

High Performance 2D Measurement System LINEAR HEIGHT

Catalog No.E12012(3)



World's best-in-class accuracy 2D measurement system

A sophisticated height gage offering exceptional accuracy of $(1.1+0.6L/600) \mu\text{m}^*$

(* L = measured height in mm)

Mitutoyo

World's Best Accuracy High Performance 2D New Linear Height Series LH-600E/EG *As of July 2012.

feature 1 World-class accuracy

- **Achieved accuracy: $(1.1 + 0.6L/600) \mu\text{m}$**

Best-in-class accuracy has been achieved by using a high-accuracy scale unit and high-accuracy guiding mechanism manufactured in our dedicated scale plant.

Displacement accuracy when measuring a height of 600mm: $1.7 \mu\text{m}$

feature 2 Superior ease of operation

- **Easy operation with a single touch of a key**

Each frequently-used measurement type is initiated by one dedicated icon-type command key.

Even a novice can immediately start measurement without instruction.

- **Color TFT LCD**

This has improved legibility and operability.

- **Unlimited USB memory**

Compatible models support more than 2 GB of USB memory.

- **High-accuracy air suspension assists measuring**

The Linear Height can move without friction over a surface plate using an air bearing incorporated in the base, powered by the small built-in compressor.

A semi-floating mode is also provided that allows measurement with the gage barely floating with no influence on the measuring accuracy.

This mode is effective in operations such as scanning measurement of a hole or shaft on a large workpiece and displacement measurements performed while moving the gage.

Additionally, the power grip model (518-352-10 LH600EG) has improved handling operability.

feature 3 Numerous functions and options

- **Powerful measurement/calculation functions**
(See page 4 for details.)

Numerous types of measurement such as displacement/straightness/squareness are possible in addition to basic measurement functions including height and circle measurement.

This gage is also equipped with the 2D measurement function, tolerance judgment function, and others.

- **Standardization of measuring procedures**

Teaching the gage a series of measuring operations for a workpiece is possible (Repeat function). This function is very effective when measuring large batches of workpieces. Upon execution of the Repeat function, the probe automatically moves to the next measurement position (height). If an operation procedure manual is available, measurement can be standardized.

- **Supporting quality control with statistical processing functions**

GO/NG judgment is performed real-time on measured data. Up to 60,000 pieces of data can be stored in the database, on which can be performed various statistical calculations such as average, standard deviation and process capability. Quality control is also supported by graphic display of histograms.

- **Highly capable data processing unit**

The high-performance CPU supports future software upgrading.

Measurement results are output in CSV format, thus allowing users to reuse those results with their own software.

- **Versatile external interfaces**

A printer interface is provided, which is installed in the main unit to connect a thermal printer or A4 size printer. The USB interface allows a USB memory to back up and restore part programs and measured data that have been stored.

Moreover, the RS-232C interface can output measurement results to an external device such as a PLC (Power Line Communications).

- **Numerous optional probes**

This gage is provided with various types of probes and interchangeable styli flexibly compatible with complicated workpiece profiles and various measurement features.

Mitutoyo's lineup of options offers various interchangeable styli for $\phi 5$ ball probes, depth probes, dial indicator holders, etc.

The optional probes extend their flexibility with an M2/M3 threaded shank that allows various CMM styli to be attached.


Measurement System*



Diverse interfaces

- Printer
- USB
- RS-232C
- Digimatic input

[Rear panel (connectors)]

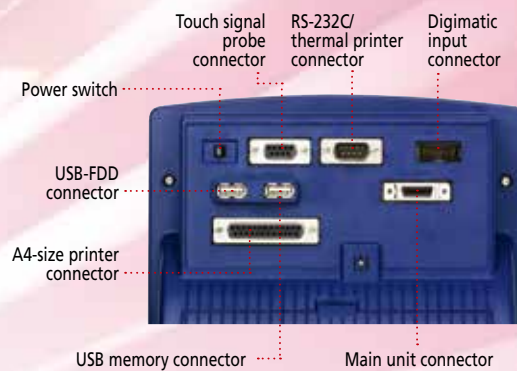

Reflective-type linear encoder & guide achieve world-class accuracy

Numerous accessories compatible with many types of workpiece and measurement features provided in addition to standard $\varnothing 5\text{mm}$ ball probes

High-accuracy air bearing that can be operated in semi-floating mode while making highly accurate measurements and fully floating mode for frictionless travel over a surface plate


5.7 inch color TFT LCD

Icon-type command keys provide simple one-touch operation to drive powerful functionality

A complete cordless system with a built-in compressor and battery, allowing frictionless movement on a surface plate

Functions

The touch of a single key automatically runs the instrument until the last result is displayed. This eliminates the need to execute key operations at each step in the measurement process, allowing you to concentrate 100% on workpiece inspection.

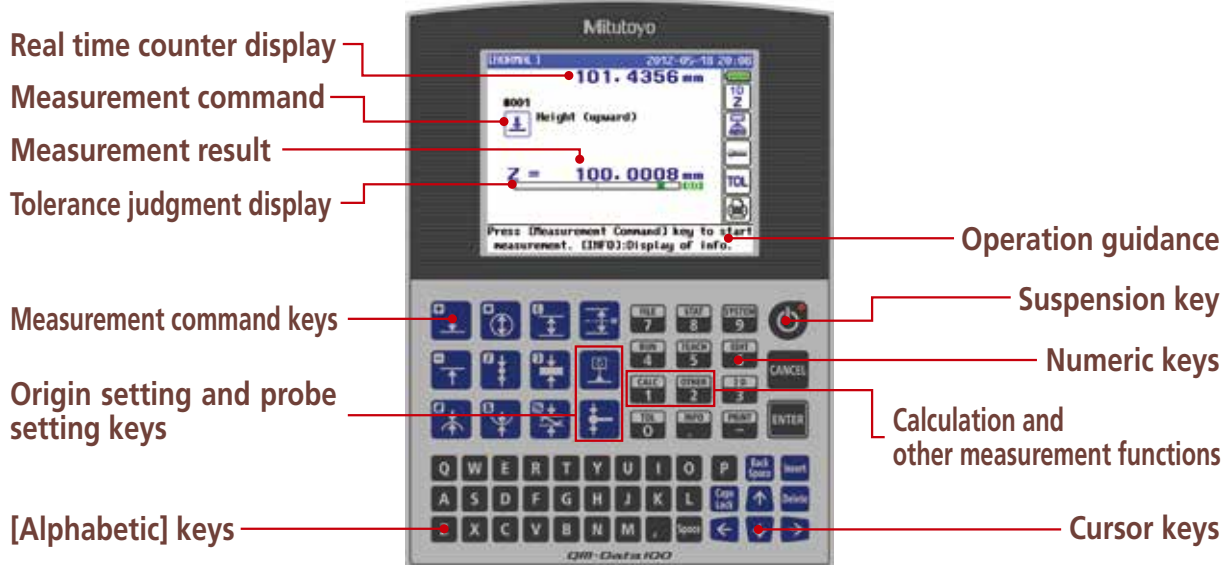

Single-touch Basic functions





	Measures the height of an upward-facing surface.		Measures the diameter and center of a hole.		Measures the width and center of an inner diameter.		Measures the width and center position between two elements.
	Measures the height of a downward-facing surface.		Measures the diameter and center of a shaft.		Measures the width and center of an outer diameter.		Sets the ABS origin (absolute reference origin) or INC origin (incremental origin defined by the user), switches between ABS/INC origins and sets the offset ABS origin.
	Measures the maximum height of a downward or upward-facing surface.		Measures the minimum height of a downward or upward-facing surface.		Measures the difference between maximum height and minimum height of an upward or downward facing surface.		Sets the probe type, measures the probe diameter, inputs the probe diameter, saves the probe, loads the probe and shifts the probe position.
	Performs calculation, including angle.		Displays a comment when operations are paused, measures the position of a hole with a tapered probe, inputs measurement from a Digimatic measuring instrument and measures perpendicularity.		Suspends or resumes system operation.		

Other functions

2D measurement	2D origin setting, XY axis setting, Element recall, Polar coordinate recall, Coordinate distance calculation, 2D distance calculation, 2 elements intersection-angle calculation, 3 elements intersection-angle calculation, Pitch-circle calculation
Tolerance judgment function	Tolerance/nominal value setting, Tolerance judgment result output, Warning functions
User-support functions	Switching resolution, Power saving function, Switchable measurement speed, Semi-floating measurement
Part-program functions	Creating/editing/executing a part program
Statistical processing functions	Basic statistical processing, Histogram
Accuracy-compensation functions	Temperature compensation, Scale factor

Screen display examples

The measurement operation is supported with graphics on the large LCD.

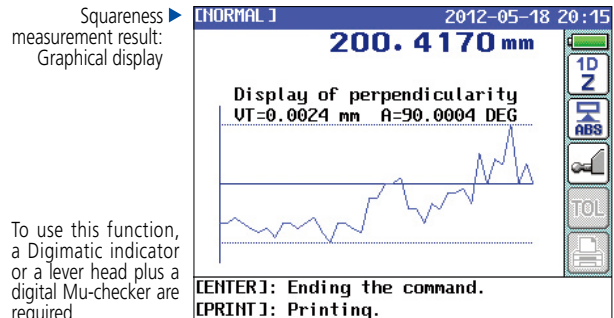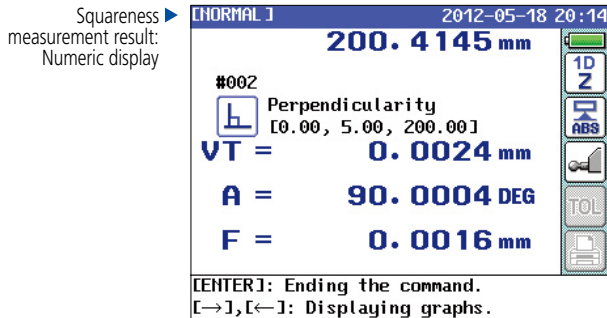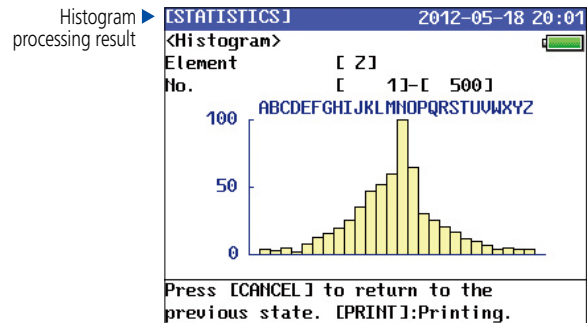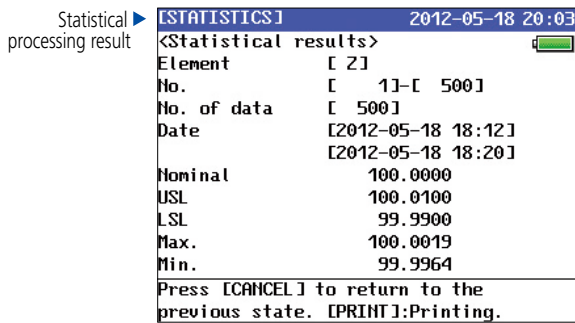


To use this function, a Digimatic indicator or a lever head plus a digital Mu-checker are required.

Printer output examples


A thermal printer that can be attached to the Linear Height main unit is available as an optional accessory.

Result data can also be output to a commercial A4 size printer.


Thermal printer output

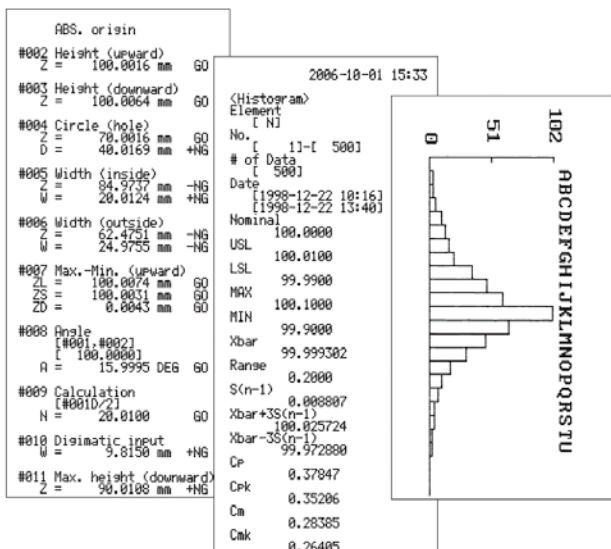

A4 printer output

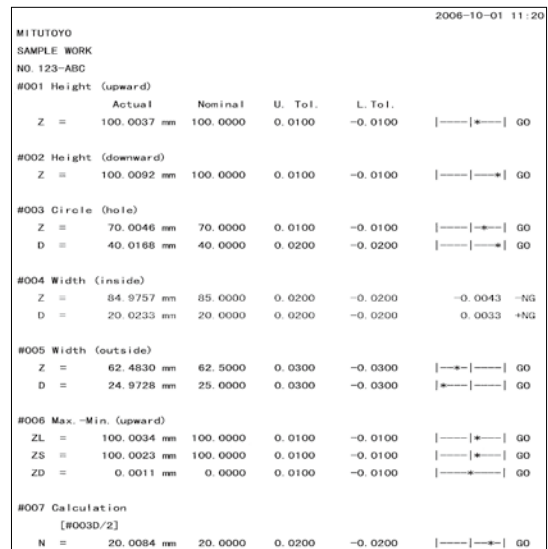


Frequently used measurements

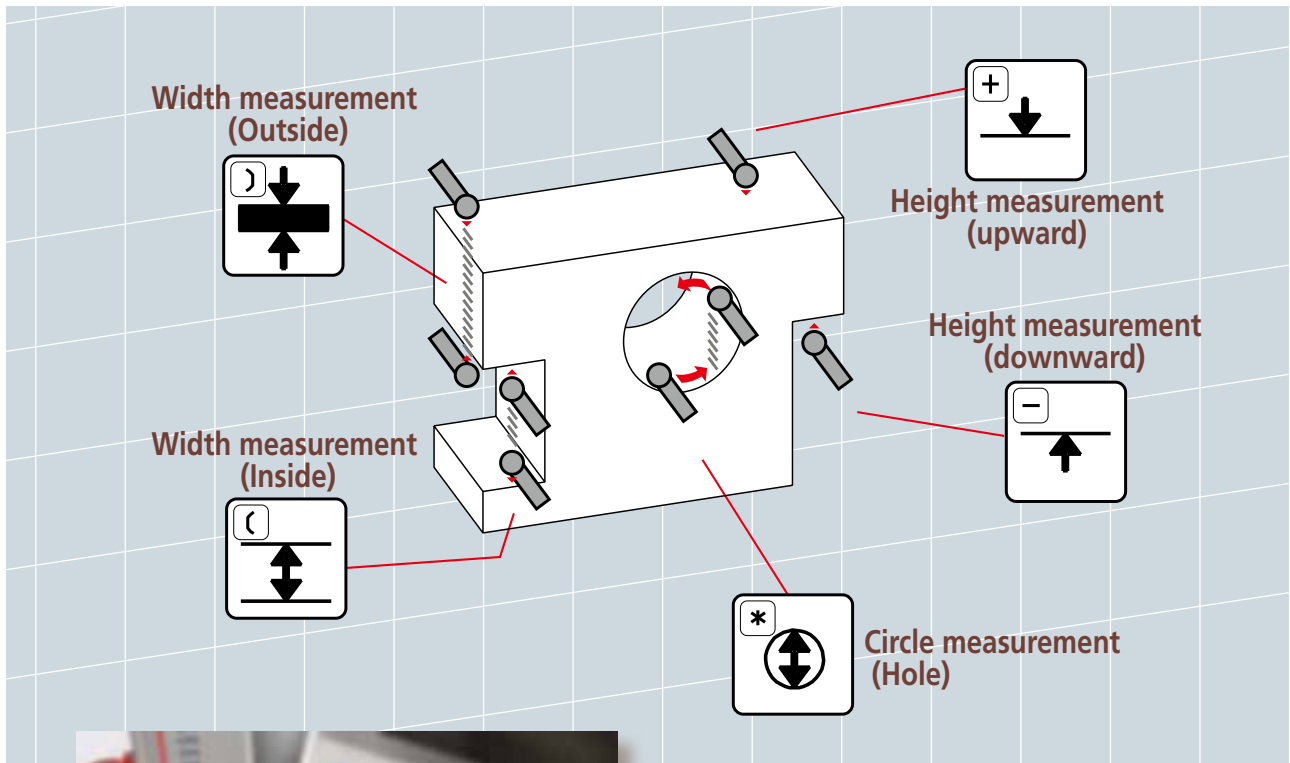

The power grip makes it easy to approach the workpiece.

Optional Accessories

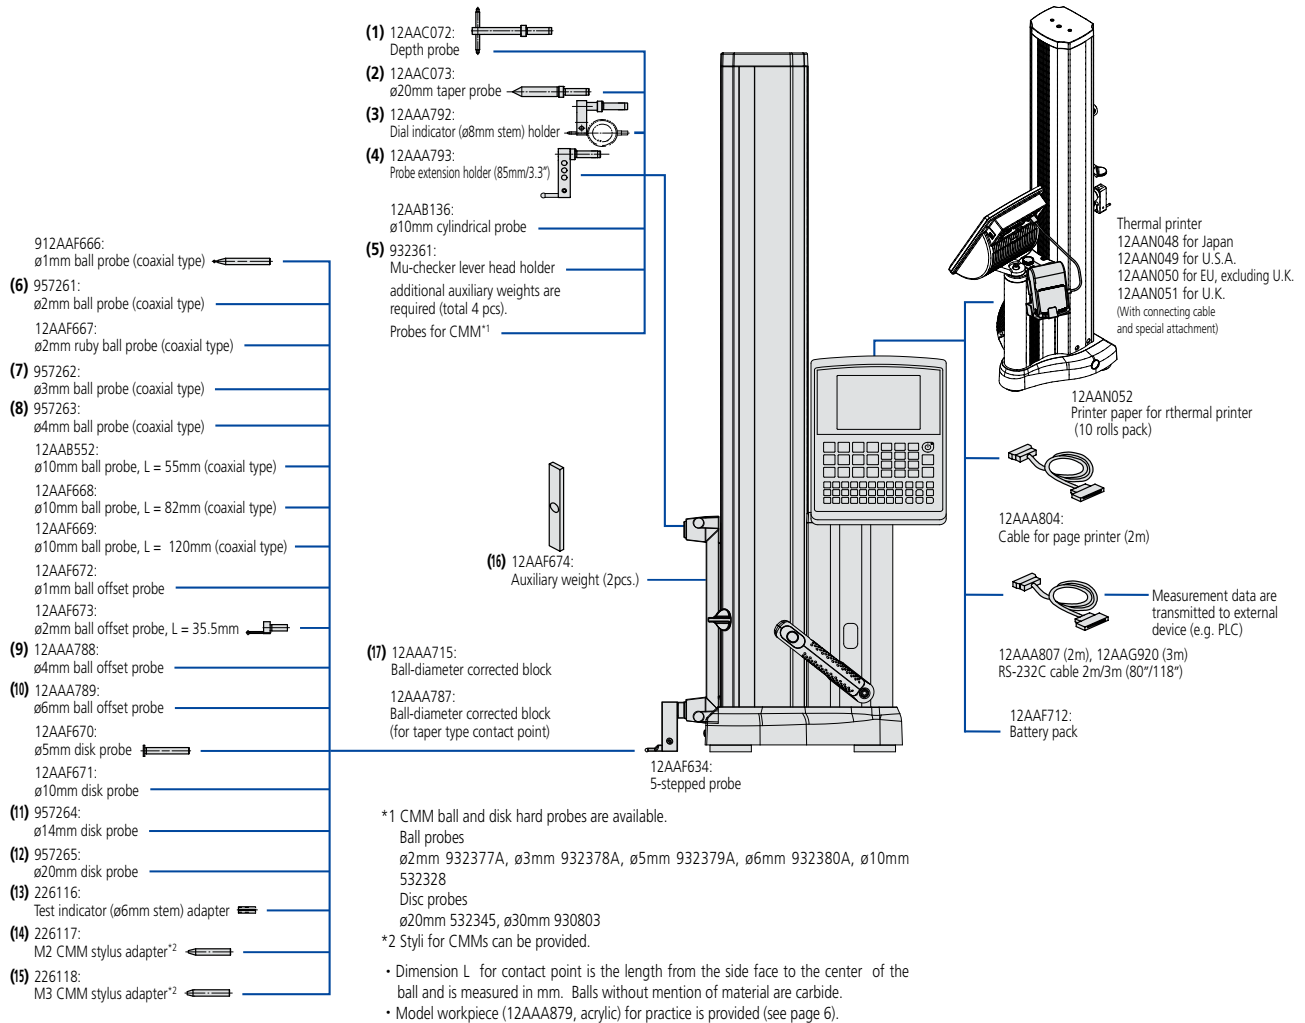

Many kinds of optional probes enable many types of measurement



A choice of peripherals expand functionality



(18) Thermal printer

Specifications

Order No.	518-351-10 ^{*4}	518-352-10 ^{*4} (with power grip)
Measuring range (Stroke)	0 - 977mm (600mm) 0 to 38" (24")	
Resolution	0.0001/0.001/0.01/0.1mm (selectable) .000001/.00001/.0001/.001"(selectable)	
Accuracy (at 20°C)	Indication accuracy ^{*1}	(1.1 + 0.6L/600) μm, L = Measured length (mm)
	Repeatability ^{*1}	Plane: 0.4 μm (2σ), Hole: 0.9 μm (2σ)
	Perpendicularity (forward and backward) ^{*2}	5 μm (after compensation)
	Straightness (forward and backward) ^{*2}	4 μm (mechanical accuracy)
Guiding method	Roller bearing	
Driving method	Motor-driven (5,10,15,20,25,30,40mm/s: 7 steps)/Manual	
Scale unit	Reflective-type linear encoder	
Measuring force	1N (automatic constant-force function)	
Balancing method	Counter weight balance	
Main unit moving mode	Full-floating(moving) / Semi-floating(measuring) air bearing	
Air source	Built-in compressor	
Monitor	5.7 inch COLOR TFT LCD (320 x 240 dots, with LED backlight)	
Max. number of programs	50	
Max. number of measured data	60,000 (Max. number of data is 30,000 / one program)	
Power supply	AC adapter / Battery (Ni-MH)	
Battery endurance	Operating	Approx. 5 hours (compressor duty cycle 25% max.)
	Standby	Approx. 10 hours
Battery charging time	Approx. 3 hours (usable during charge)	
Dimensions (WxDxH)	237x448x1013mm	247x448x1013mm
Mass	24kg	24.5kg
Operating temperature range	5 - 40°C / 20 - 80% RH (without condensation)	

*1 Guaranteed when using the standard eccentric φ5 probe.

*2 Guaranteed when using the Lever Head (MLH-521), Mu-Checker (M-511).

Perpendicularity for horizontal direction is not defined. If the workpiece is cylindrical, measurement error may be observed.

*3 Mitutoyo does not guarantee the operation of all commercial USB memories except for the following.

Mitutoyo recommends those USB memories made by SanDisk Corporation or IO DATA DEVICE, INC. and that meet the following requirements.

- Those that are not compliant with USB3.0
- Those that have no security function such as encryption and fingerprint authentication
- Those that have no write-protect switch function

*4 Order No. depends on the destination as shown in the table below:

Model without power grip

Order No.	Remarks
518-351-10	Model for Japan, Japanese manual
518-351A-21	Model for North America, English manual
518-351A-22	Model for South America, Spanish manual
518-351D-21	Model for EU, English manual
518-351E-21	Model for U.K., English manual
518-351DC	Model for China, Chinese manual
518-351K	Model for Korea, Korean manual

Model with power grip (Power grip pre-installed model)


Order No.	Remarks
518-352-10	Model for Japan, Japanese manual
518-352A-21	Model for North America, English manual
518-352A-22	Model for South America, Spanish manual
518-352D-21	Model for EU, English manual
518-352E-21	Model for U.K., English manual
518-352DC	Model for China, Chinese manual
518-352K	Model for Korea, Korean manual

• It is recommended to use the Linear Height on a surface plate of high flatness accuracy.

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. Only quotations submitted by ourselves may be regarded as definitive.

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Dimensions

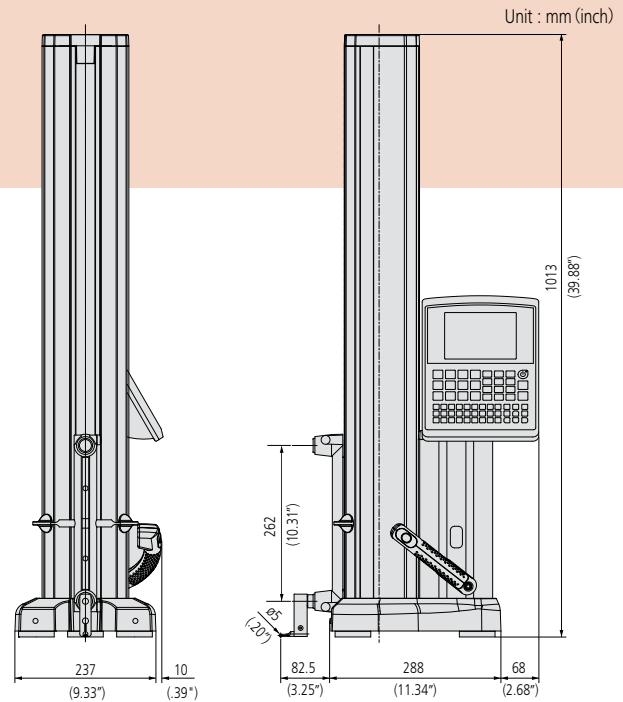

Standard accessories

- 5-step probe
- Battery pack
- Clear cover
- Hex wrench
- Ball-diameter corrected block
- AC adapter
- Carrying handle
- Manual set
- Auxiliary weight (2pcs.)
- Power cable for AC adapter
- Cap
- Inspection certificate

Export permission by the Japanese government may be required for exporting our products according to the Foreign Exchange and Foreign Trade Law. Please consult our sales office near you before you export our products or you offer technical information to a nonresident.

Coordinate Measuring Machines	=====
Vision Measuring Systems	=====
Form Measurement	=====
Optical Measuring	=====
Sensor Systems	=====
Test Equipment and Seismometers	=====
Digital Scale and DRO Systems	=====
Small Tool Instruments and Data Management	=====

Mitutoyo Corporation

20-1, Sakado 1-Chome,
Takatsu-ku, Kawasaki-shi,
Kanagawa 213-8533, Japan
T +81 (0) 44 813-8230
F +81 (0) 44 813-8231
<http://www.mitutoyo.co.jp>

Mitutoyo